

Army Public School Beas
PO : Dhilwan
Distt: Kapurthala
Punjab : 144804

1513/APS/Visitors Room

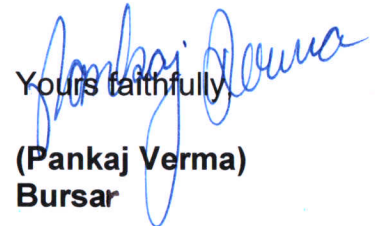
19 Jun 2024

CALL FOR QUOTATIONS: CONSTRUCTION OF NEW WASHROOM FOR VISITORS ROOM BY APS BEAS

Dear Sir/Madam,

1. The quotations are hereby invited from vendors/dealers/contractors with varied experience in the field of said work. The quotations are required as appx att.
2. The sealed Bids are required to be addressed to Principal APS Beas and to be deposited before **1000 hrs on 22 Jun 2024**. The sealed quotations box is available at the main gate of **HQ 55 (I) Mech Bde**.
3. No cutting on any figures will be accepted. The vendors/firms are at liberty to be present during bid opening for fair & transparent bidding.
4. **Validity of quotations**. The quotations will be valid for at the least 3 months from date of opening
5. **Date & Time for completion of work**. The work is required to be completed within 21 working days from the issue of supply order.
6. **Force majeure**. The school will not be responsible for any untoward / unforeseen requirements as generated at the vendors end.
7. **Payments**. The payments will be made by the school after inspection of work at APS Beas within stipulated time.
8. **Demurrage**. Late work scheduled will be charged demurrage @ 5% for delayed time scheduled of the project cost.
9. **Manufacturing guarantee/ warranty**. The contractor firm will be responsible for any defect or maintenance or low quality work/ performance /material. If found any during inspection by the authority of school. Adequate charges will be levied from the bills paid by the school. The school deserves the right to cancel/ modify the supply order/ schedule of work at any stage as per requirement of the school.
10. Please also mention "**CONSTRUCTION OF NEW WASHROOM FOR VISITORS ROOM**" on the top outside of envelope.

Yours faithfully,


(Pankaj Verma)
Bursar

CALL FOR QUOTATIONS: CONSTRUCTION OF NEW WASHROOM FOR VISITORS ROOM BY APS BEAS

S. No	Description/ Scope of Work	Qty	Total amount
(a)	Demolishing work(Taking down chowkhats, Taking down sanitary items, Taking down tiles/Plaster & Dismantling floor).	01 Job	
(b)	Civil work - Erection of new walls and RCC slab to be casted, - repair on wall & floor (Rough plaster for tiles on walls & floor and counter slab)		
(c)	Removal of malba		
(d)	Piping & wiring of sanitary work. (finolex)		
(e)	Sanitary fittings (Jaguar basic range) Counter wash basin - 1 No, wall hung WC - 1 No and Unrinal - 1 No, Sanitary fittings (Jaguar basic range), Taps - 1 hand faucets - 1 No		
(f)	Electrical wiring & piping (ISI mark)		
(g)	Electrical lighting LED panel 8 watt - 4 No (Jaguar), switches (Havells), wall fans - Orient - 1 No, Exhaust fans Orient - 1 No		
(h)	Tiles on walls (Vitrified tiles) (size: 4'-0" x 2'-0"). Till 7'-0" height		
(j)	Tiles on floor (Volento), (size: 2'-0" x 2'-0") anti skid		
(k)	Tiles labour & material		
(l)	Black granite on counter slab		
(m)	Aluminium heavy gauge door (1 Pc) with material & labour and granite chowkat - 1 No (on main entrance door of washroom).		
(n)	Glass work - Looking glass - 1 No, glass partition between urinal - 1 No		
(o)	Paint work on walls and ceiling (emulsion with putty and primer)		
(p)	Building the walls for toilet seats whereas required		
(q)	Close the window with Bricks, Plaster and Paint		
(r)	False ceiling		
(s)	Connection of roof drain pipe and washroom with manhole.		
(t)	GST		
(u)	Freight		
(v)	Any other charges, if applicable		
(w)	Total		

Note :- There should not be outside something and wiring connection visible.

Signatures _____
Name & Place/Address of firm with stamp
Mobile No-